


CONVEYOR BELTS FOR GENERAL PURPOSE



Choose this category if transporting medium abrasive materials. You will get a good solution at competitive price.

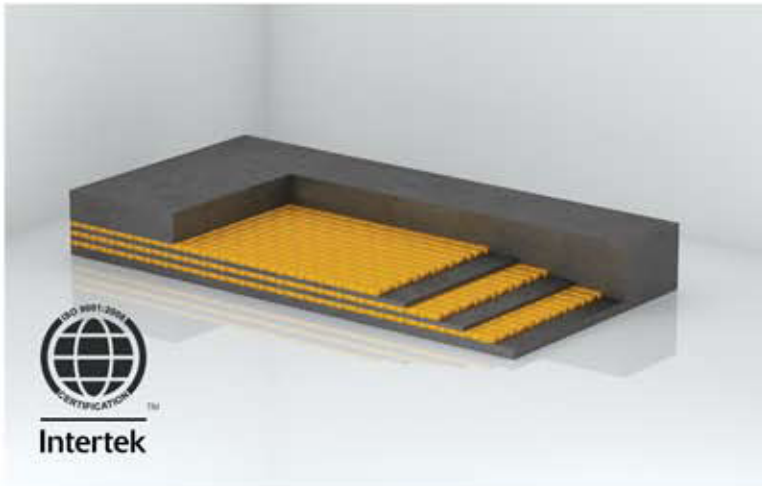

The conveyors are supplied in rolls rolled into wooden chairs and secured by metal/plastic straps. We also offer non-standard packaging upon request.



ADVAN[®] conveyor belts allow a wide temperature range of the working environment.



These are conveyor belts for medium to light operating conditions. High, medium and low abrasive bulk and packaged material, including agricultural products, packaged food are transported.

Depending on the characteristics of the covers, the following conveyors in the table below are manufactured:

INDICATORS	TYPE OF RUBBER COVERING	
	Technical Characteristics: (DIN 22102: 1991)	
	Advan [®] -Y	Advan [®] -Z
Tensile strength N/mm, min	20	15
Elongation %, min	400	350
Abrasion mm ³ , max	150	250
Designation	High abrasive materials including cobs of 250 mm and coal up to 500 mm	Light abrasive materials including cobs of 80 mm and coal up to 250mm.

Antistatic in accordance with standard EN ISO 284:2007.

The category "general purpose" is recommended for: agriculture and food industry.

Type	Belt strength /N/mm/	Top cover /mm/	Bottom cover /mm/	Total thickness /mm/	Adhesion /min/	Elongation EASL (10%) /%/	Standard roll length /m/	Operational temperature /°C/
400/3	440	6-3	3-1	13-8	7	0.6	400	-25° - +70°
315/3	350	4-3	2-1	9-7	7	0.6	400	-25° - +70°
250/3	280	4-3	2-1	9-7	7	0.6	400	-25° - +70°
250/2	280	4-3	2-1	8.5-6.5	7	0.6	400	-25° - +70°
200/2	240	3-2	2-1	7-5	7	0.6	400	-25° - +70°
160/2	180	3-2	2-1	7-5	7	0.6	400	-25° - +70°

There are other configurations upon request.

